
Nivåställ typ glasrör

Glass Tube Level Gauge

R-D

PN 16

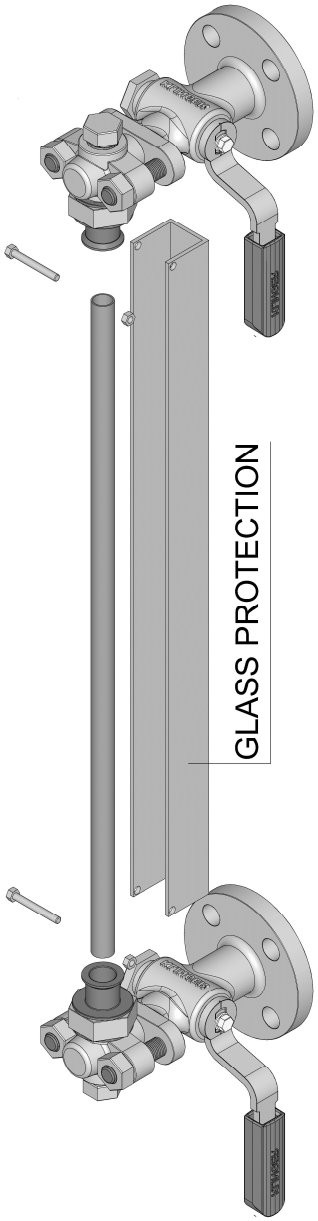

Klinger R-D: Nivåställ typ glasrör för ång- och processapplikationer med avstängningsventiler: mjutätande ventiler, typ D(med silikonpackningar.

Skydd glas
Mot förfrågan kan vi erbjuda ett glasskydd i kolstål

Anslutning avstängningsventiler
Roterbara (360°) med glasrör diameter 16 mm.

Anslutning mot tank
Fläns ï Utvändig gäng

Klinger R-D: glass tube level gauge for steam and process applications suitable for shut-off fittings: soft sealed gauge cocks, model D (with silicon packaging)

Glass protection
On request, we can supply a glass tube protection, in carbon steel.

Connection gauge body-gauge cock
Rotatable (360°) with glass tube diam. 16 mm.

Vessel connection
Flanged - male threaded

Tryck och temperatur	Working conditions	
	P max	**T max**
Ånga/steam	10 bar	185°C
Process/process	PN 16	120°C

Klinger materialkoder	Klinger material codes
FS/H: Mediaberörda delera i kolstål	FS/H: components in carbon steel
M/H: Mediaberörda delar i AISI 316	M/H: components in contact with media in AISI 316
M: Alla delar i rostfritt syrafast stål	M: all components in stainless steel

Tillbehör	Accessories
Dränerings- och avluftningsventiler	Drain/vent cocks
Säkerhetskulor	Safety balls
Graderad skala	Graduated scale

Enligt PED 2014/68/UE om tillämpligt
Compliance to PED 2014/68/UE when applicable

Enligt ATEX 2014/34/UE mot förfrågan
Compliance to ATEX 2014/34/UE upon request

Caratteristiche e dimensioni possono essere soggette a modifiche senza preavviso


Design and dimensions could be subject to modification without notice

Nivåställ typ glasrör

Glass Tube Level Gauge


R-D

PN 16

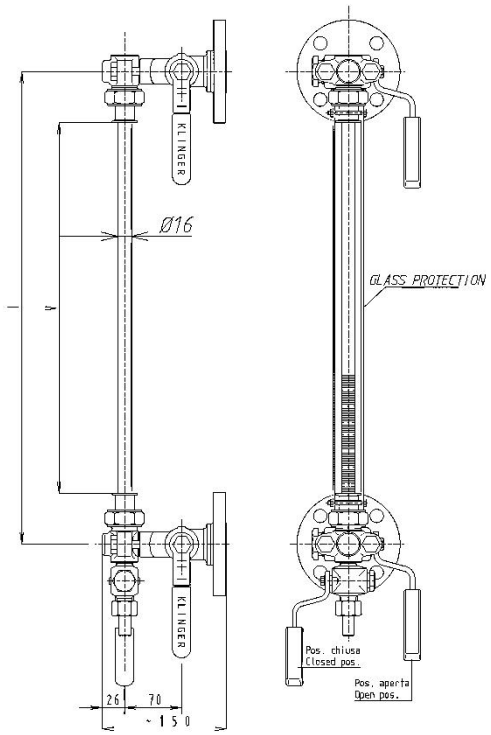

V=I-125
Visningslängd = Center till center ï 125 mm
Sight length = Centre-to-centre ï 125 mm

L=I-20
Längd glasrör = Center till center ï 20 mm
Glass tube length = Centre-to-centre ï 20 mm

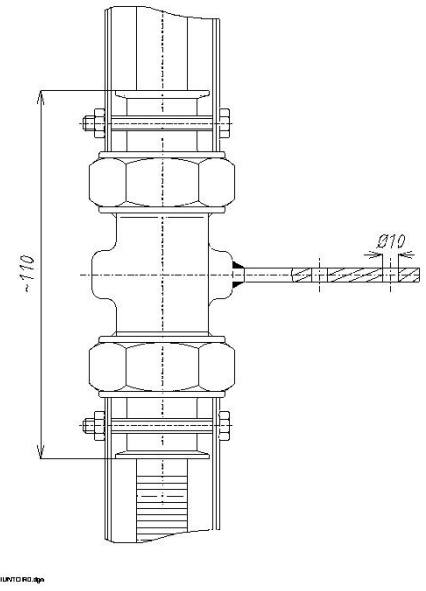

Unionskoppling / Union piece

För center till center större än 1500 ï 2000 mm behövs ytterligare en unionskoppling.

For centre to centre distances exceeding 1500-2000 mm One or more union pieces must be used.

Längd glasrör (med unionskoppling):
Glass tube length (with union pieces):

$$L_{glass} = \frac{I - (15xZ) - 25}{Z + 1} mm$$

Z= Antal unionskopplingar
union piece number

Klinger Sweden AB
Kontovägen 3
SE-17562 Järfälla ï Sverige
Tel. +46 (0)10 1998700
Fax. +46 (0)8 7392130
www.klinger.se